

Wireless Gas Boiler Thermostat

Room comfort, with control at your fingertips.



WORKS WITH
alexa



works with the
Google Assistant

433 MHz

Wireless RF link

PROGRAMMABLE


Heating schedules

DUAL POWER

Battery / USB-C

See more. Adjust easily.

A color VA LCD shows room temperature, set temperature and heating status at a glance.

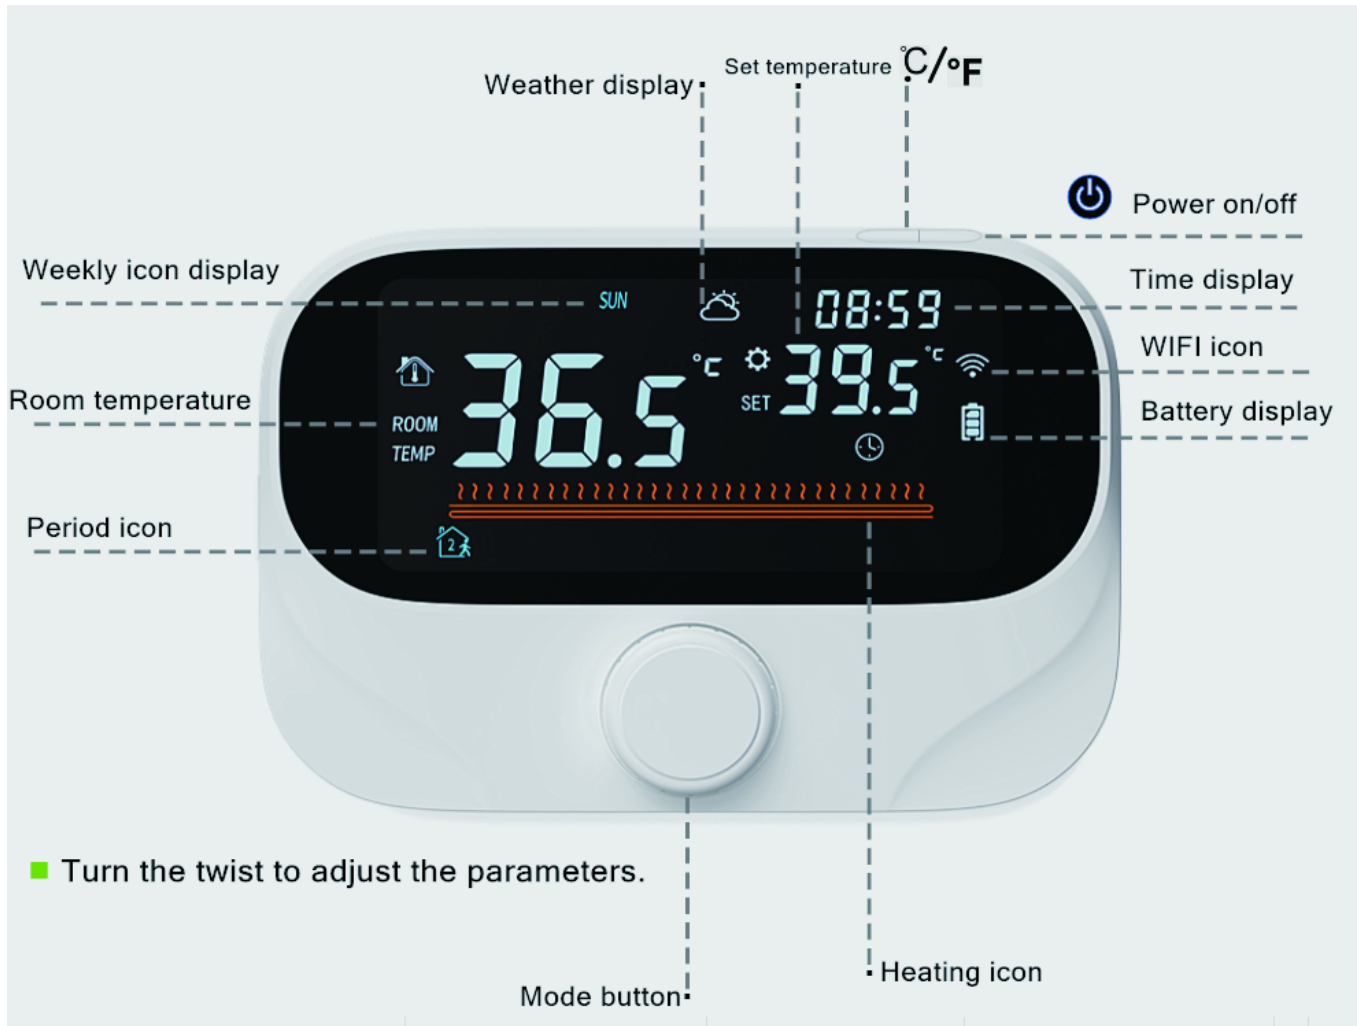

Rotary adjustment

Turn the front dial to adjust temperature and settings.

Flexible operating modes

Choose manual, automatic or energy-saving operation.

Useful daily information

View time, weekday, battery level and connected weather information.

Practical safeguards


Child lock helps prevent accidental changes. Switch between Celsius and Fahrenheit.

Place it where you need it.

A wireless thermostat panel communicates with a separate receiver connected to the heating system.


Wall mounting or desktop placement

The distance between the thermostat and the receiver is not more than 100 meters

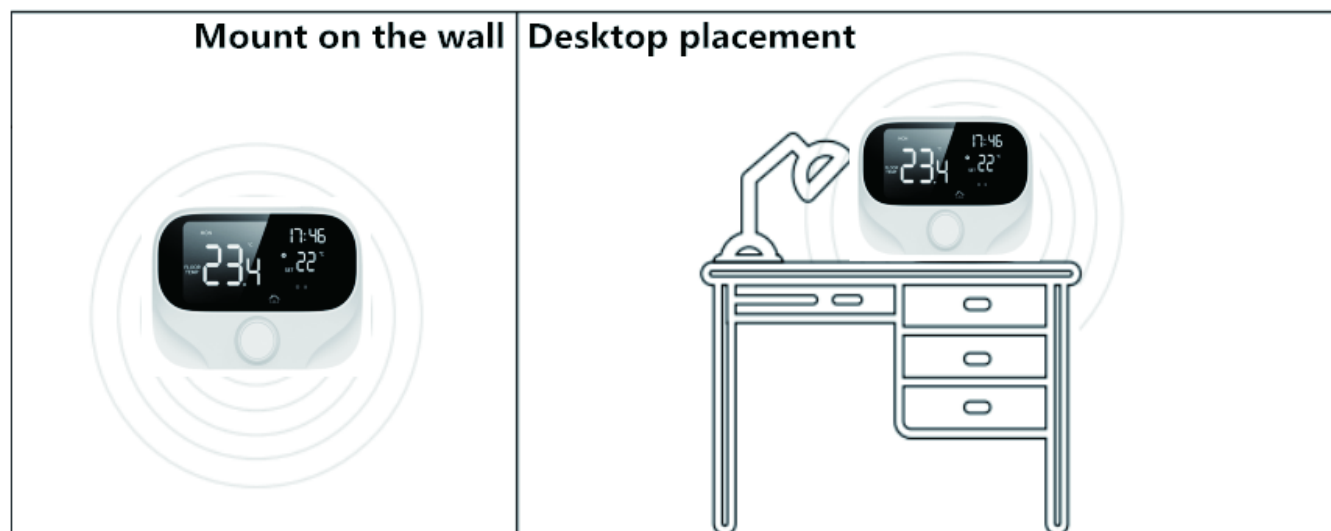


Recommended installation distance: within 100 m of the receiver. Actual range depends on walls and the surrounding environment.

Two power options

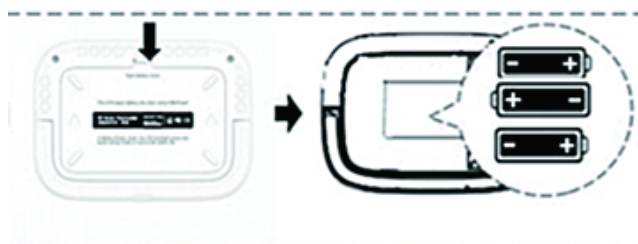

Battery powered

Uses 3 AA alkaline batteries for flexible placement.

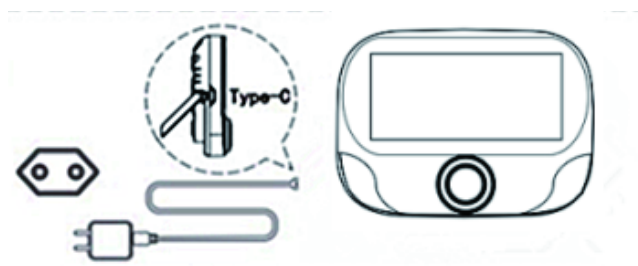


USB-C powered

Connect a USB-C cable for an external power supply.

Heating that fits your day.

Control your heating locally, through the app or with a compatible voice assistant.

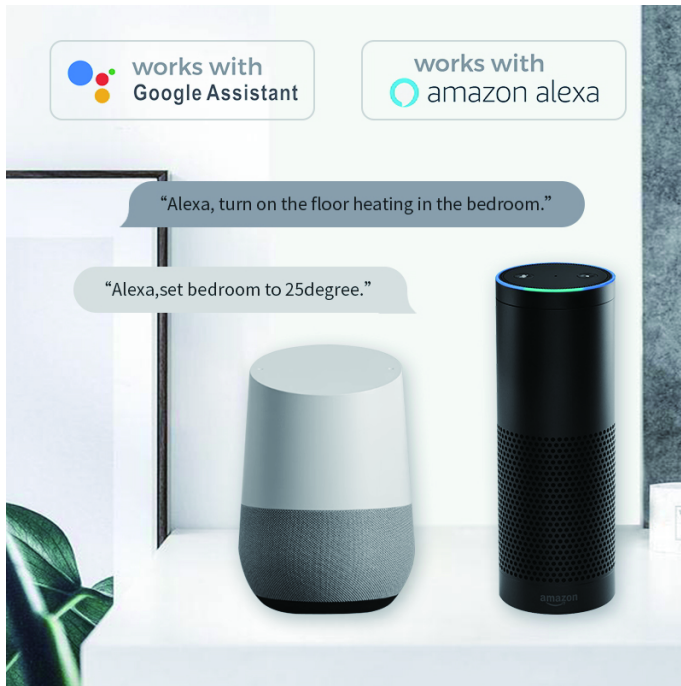

App control

Supports Tuya Smart and Smart Life for convenient temperature adjustment and heating management.

Voice control

Works with Amazon Alexa and Google Assistant for hands-free control with compatible services and devices.

Programmable comfort

Choose a 5+2, 6+1 or 7-day schedule. Program six workday periods and two rest-day periods, with adjustable times and temperatures.

A schedule you can tailor

Set comfort temperatures for the times you are at home and lower settings for other periods. A temporary temperature adjustment in automatic mode applies to the current period.

Temperature memory

Retains settings for convenient everyday use.

Energy-saving mode

Use a dedicated temperature setting to match your heating needs.

Product specifications

Thermostat panel and receiver for wireless room-temperature control.

Thermostat panel

Dimensions (W x H x D)	118 x 86 x 24 mm
Power supply	3 AA alkaline batteries / USB-C
Temperature setting range	5-60 °C
Listed control accuracy	0.1 °C
Display	Color VA LCD

Receiver

Dimensions (W x H x D)	86 x 86 x 26 mm
Power supply	AC 90-240 V, 50/60 Hz
Rated load current	3 A
Boiler control connection	COM / NO dry contact

Shared specifications

Wireless frequency	433 MHz
Operating temperature	5-50 °C
Housing / protection	Flame-retardant PC/ABS V0 / IP20
Listed power consumption	1 W per unit

RF range: up to 300 m stated in the specifications; installation guidance recommends a separation of no more than 100 m. Site conditions affect performance.

Standard package

					
Product host	Signal line	Charging cable	Set screw	Product certificate	specification

Thermostat and receiver, signal cable, USB cable, mounting screws, product certificate and user guide.